


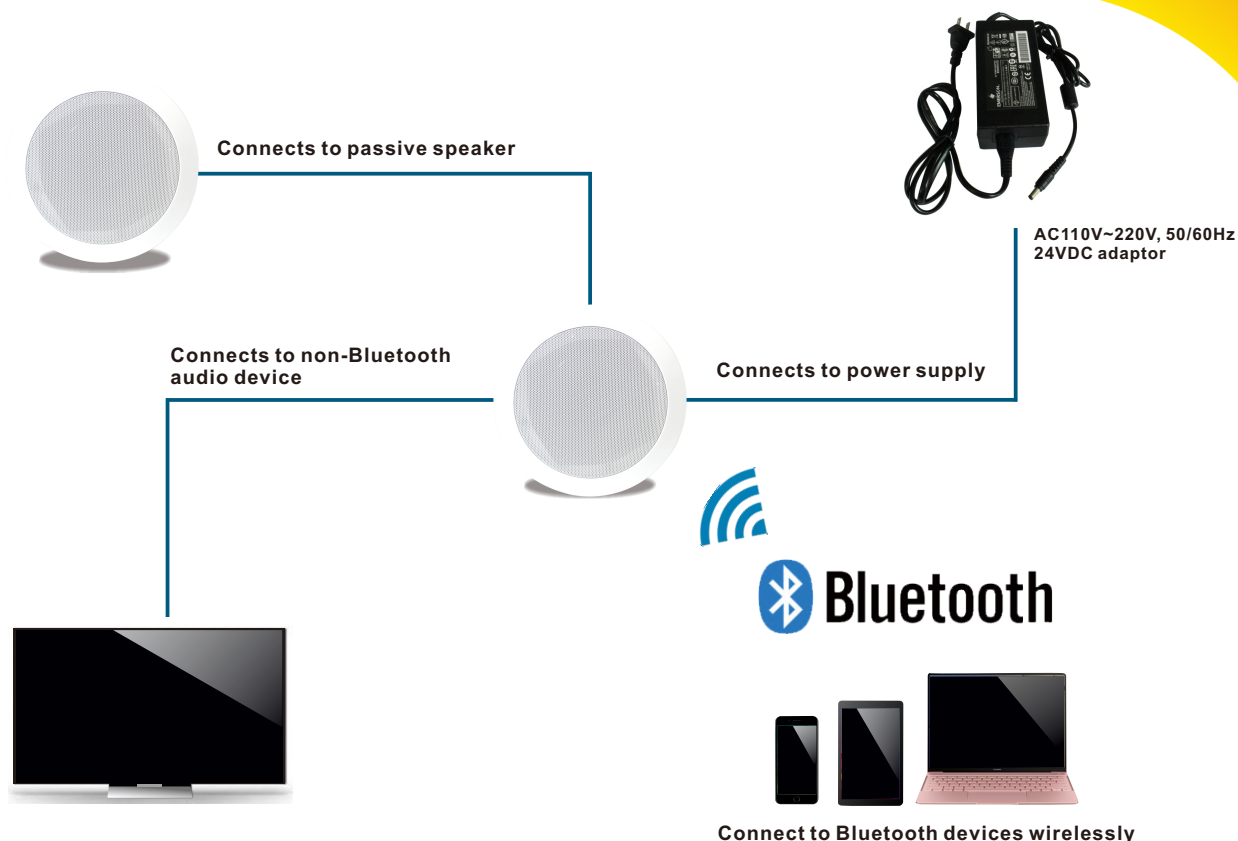

## SPECIFICATIONS

|                                    | CB-215                 | CB-415 | CB-215T                | CB-415T |
|------------------------------------|------------------------|--------|------------------------|---------|
| Output Power                       | 2*15W                  | 4*15W  | 2*15W                  | 4*15W   |
| Impedance                          | 8Ω                     | 4Ω     | 8Ω                     | 4Ω      |
| SPL (1W/1M)                        | 93dB                   |        | 93dB                   |         |
| Frequency Response                 | 80~18KHz               |        | 70~20KHz               |         |
| Input Sensitivity                  | 400MV                  |        | 400MV                  |         |
| Line input switch-on signal level  | >200MV                 |        | >200MV                 |         |
| SNR                                | 90dB                   |        | 90dB                   |         |
| Input voltage of the power adapter | AC110V~240V, 50Hz/60Hz |        | AC110V~240V, 50Hz/60Hz |         |
| Bluetooth Wireless Range           | ≤10M                   |        | ≤10M                   |         |
| Housing Material                   | ABS, Iron (Grille)     |        | ABS, Iron (Grille)     |         |
| Speaker Size                       | 5" Woofer              |        | 5" Woofer, 1" Tweeter  |         |
| Weight                             | 0.7 Kg                 |        | 1 Kg                   |         |
| Dimensions                         | Ø203*70mm              |        | Ø203*70mm              |         |
| Hole Cut-out Size                  | Ø170mm                 |        | Ø170mm                 |         |
| Color                              | White                  |        | White                  |         |