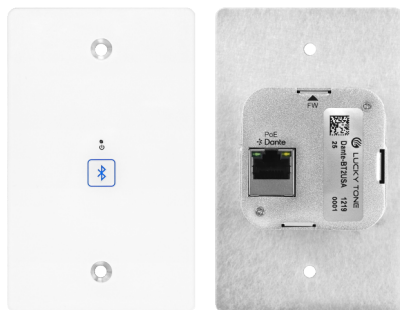


Dante Bluetooth Wall Panel
Features

- ▶ Bluetooth audio converted directly to Dante network output.
- ▶ Single-cable PoE power, no local power supply required.
- ▶ Quick and easy one-touch bluetooth pairing.
- ▶ Remote configuration and control via Dante Controller.
- ▶ Available in US and EU wall-mount standards.


Dante-BT2USA

Dante-BT2EU


Model	Dante-BT2USA	Dante-BT2EU
Panel Standard	USA Standard	EU Standard
Input	Bluetooth	Bluetooth
Output	Dante	Dante
Frequency Response	20Hz-20kHz $\pm$ 3dB	20Hz-20kHz $\pm$ 3dB
THD+N	<0.05% @1kHz	<0.05% @1kHz
SNR	>105dB	>105dB
Sample Rate	44.1/48kHz	44.1/48kHz
Bit Depth	24bit	24bit
Protocol	A2DP/HFP/AES67	A2DP/HFP/AES67
Power Supply	PoE	PoE
Dimension (W*H*D)	69.85x114.3x34.5mm	86x86x34.5mm
Net Weight	120g	115g