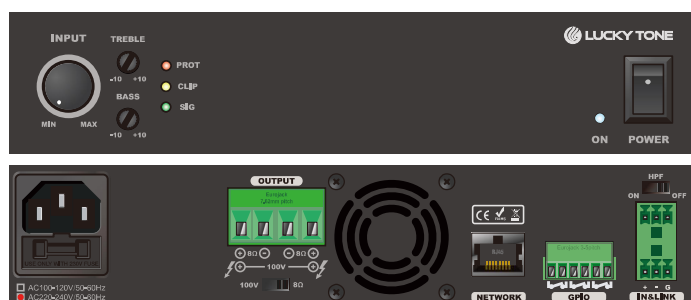


SIP Network Amplifier
Features

- ▶ Empowered by high-speed dual-core (ARM + DSP) chip of industrial grade
- ▶ Support MP3, WMA, WAV and more decoding
- ▶ With a standard RJ45 network interface and supports online firmware upgrade from long distance
- ▶ 120Watts ~ 480Watts output
- ▶ Advanced protection system includes current limiting, over current and thermal protections
- ▶ Desktop type with rack mount bracket
- ▶ Two bands tone controls
- ▶ Low distortion and low noise level
- ▶ Compact in Size and easy to install
- ▶ Ideal commercial and industrial use


1PC Rack Mount:
HA-BRC

2PCs Combined Rack Mount:
HA-BRC2


Model	HA-1120 SIP	HA-1250 SIP	HA-1500 SIP
Rated Power at 8ohm	2x60W	2x120W	2x240W
Bridged Power at 100V	120W	240W	480W
Power Consumption	195W	325W	588W
Network Communication Protocol	SIP		
Network Interface	10/100Base-TX, RJ45		
Decoding	MP3/WMA/WAV		
Input sensitivity / Impedance	-0dBu/10kohm Unbalanced / Balanced		
Power Supply Voltage	AC 100-120V, 50/60Hz or AC220-240V, 50/60Hz		
Speaker Output	100V / 8Ω		
Frequency Response	80Hz~17KHz (+1dB /-3dB)		
S/N Ratio	>80dB (with A-Weight)		
T.H.D	<1% (at rated power, 1kHz)		
Working Humidity	90%		
Tone Controls	Bass:100Hz(± 10dB), Treble:10KHz(± 10dB)		
Working Temperature	0°C~+40°C		
Product Dimension (WxHxD)	215*44*330 mm (Half-Rack)		
Net Weight	3.3kg		